


ACE



Elastic coupling to absorb vibrations

Characteristics:

- Used between the fan nozzle and duct to prevent the transmission of vibrations.
- It is advisable to add the B accessory at the inlet and BIC at the impulsion, except in CPV models.

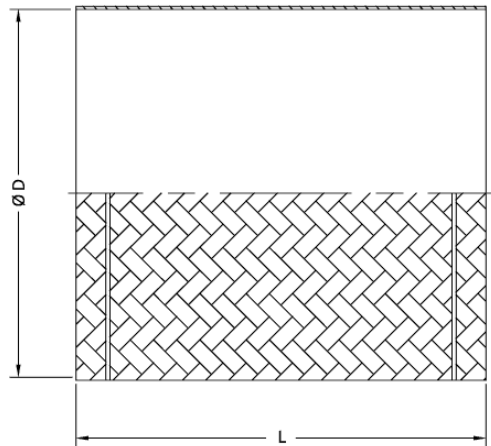

		ØD	L
ACE-52	-	52	200
ACE-63	-	63	200
ACE-80	-	80	200
ACE-100	-	100	200
ACE-112	-	112	200
ACE-125	-	125	200
ACE-140	-	140	200
ACE-150	-	150	200
ACE-160	-	160	200
ACE-180	-	180	200
ACE-200	ACE/400-200	200	200
ACE-224	ACE/400-224	224	200
ACE-250	ACE/400-250	250	300
ACE-280	ACE/400-280	280	300
ACE-315	ACE/400-315	315	300
ACE-355	ACE/400-355	355	300
ACE-400	ACE/400-400	400	300
ACE-450	ACE/400-450	450	300
ACE-500	ACE/400-500	500	300
ACE-560	ACE/400-560	560	300
ACE-630	ACE/400-630	630	300
ACE-710	ACE/400-710	710	300
ACE-800	ACE/400-800	800	300
ACE-900	ACE/400-900	900	300
ACE-1000	ACE/400-1000	1000	300
ACE-1130	-	1130	300
ACE-1260	ACE/400-1250	1250	300
ACE-1410	-	1400	300
ACE-1610	-	1610	300