

EDMF



Extra-flat bathroom extractor fans with a modern appearance and design

- Architectural integration with the bathroom elements.
- Ultra-silent.
- Extra-flat design with a thickness of just 17 mm.
- High performance thanks to its aerodynamic design.
- Can be easily and quickly installed.




Construction:

- White finish.
- Non-return gate built into all models.
- Made with recyclable materials.

Version:

- BASIC: operates with a light switch or a separate switch.
- TIMER: operates with an adjustable electronic timer.
- LL: Long life ball bearings.

CHARACTERISTIC CURVE AND ACOUSTICS AT 1.2KG/M³

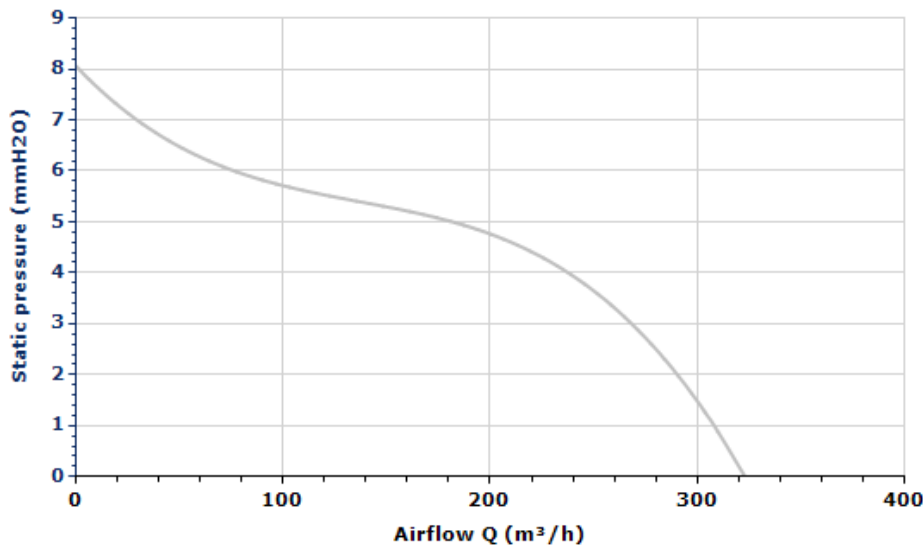


Design Point

Q (m ³ /h)	
Ps (mmH ₂ O)	

Service Point (SP)

Q (m ³ /h)	
Ps (mmH ₂ O)	
Pd (mmH ₂ O)	
Pt (mmH ₂ O)	
Impeller (rpm)	
Max. Temp. (°C)	
Outlet air speed (m/s)	

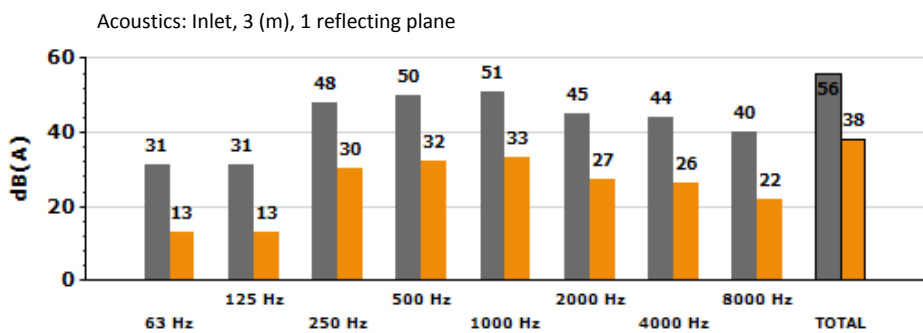

Band	Lw dB(A)	Lp dB(A)
63 Hz	31	13
125 Hz	31	13
250 Hz	48	30
500 Hz	50	32
1000 Hz	51	33
2000 Hz	45	27
4000 Hz	44	26
8000 Hz	40	22
TOTAL	56	38

TECHNICAL CHARACTERISTICS

Airflow maximum (m ³ /h)	323
Speed (rpm)	2400
Approx. weight (kg)	0.90

ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

MOTOR DATA

Max. Electrical Power (kW)	0.02
Hz/phases	50/1
Motor (rpm)	2400
Max. current (A) 220-240 V	0.13

Data can change, please check motor plate

AVAILABLE ACCESSORIES



RD



PL



VSD3/A-RFT -
VSD1/A-RFM



RM

It must be checked that the accessory is suitable for the fan model

DIMENSIONS

A	B	C	D
205	13	132	149

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

