

# EDQUIET/S



## Low-consumption household extractor fans with very low noise levels

- Architectural integration with the bathroom elements.
- High performance.
- Can be easily and quickly installed.



### Construction:

- White finish.
- Built-in non-return gate.
- Fitted with diffusers to reduce air turbulences and noise levels.


### Motor:

- Single-phase 220-240V 50/60 Hz.
- High efficiency motor.
- Ball bearings for 40.000-hour operation.
- IP44 protection.
- Motor fitted with Klixon.

### Versions:

- BASIC: operates with a light switch or a separate switch.
- TIMER: operates with an adjustable electronic timer.

## CHARACTERISTIC CURVE AT 1.2KG/M<sup>3</sup>

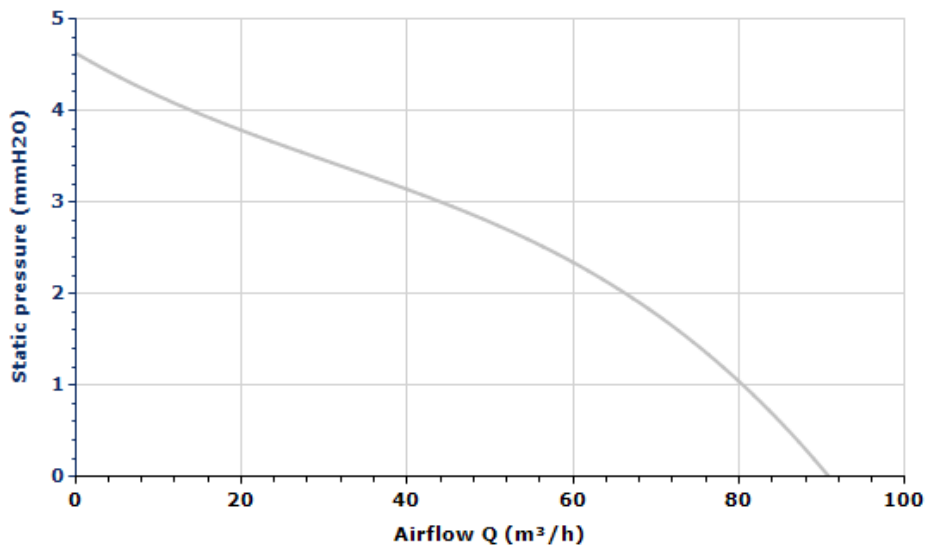

### Design Point

Q (m³/h)	
Ps (mmH2O)	

### Service Point (SP)

Q (m³/h)	
Ps (mmH2O)	
Pd (mmH2O)	
Pt (mmH2O)	
Impeller (rpm)	
Max. Temp. (°C)	
Outlet air speed (m/s)	

## TECHNICAL CHARACTERISTICS

Airflow maximum (m³/h)	91
Speed (rpm)	2000
Approx. weight (kg)	0.50

## ERP

Remarks	ErP Exclude. Pe < 125 W
---------	-------------------------

## MOTOR DATA

Max. Electrical Power (kW)	0.01
Hz/phases	50/1
Motor (rpm)	2000
Max. current (A) 220-240 V	0.05
Motor protection	IP44

Data can change, please check motor plate

## AVAILABLE ACCESSORIES



RD



PL



RM

It must be checked that the accessory is suitable for the fan model

## DIMENSIONS

ØD	B	L	L1
99	150	79	19

Dimensions without explicitly defined units are shown in millimeters (mm). Dimensions depending on the motor are approximate

