


Verso S 2100 F

Nominal air flow, m ³ /h	1900
Panel thickness, mm	50
Unit weight, kg	73
Filters dimensions BxHxL, mm	858x287x46
Electric power input of the fan drive at reference flow rate, W	340
Control panel	C5.1
Maintenance space, mm	400



C5.1

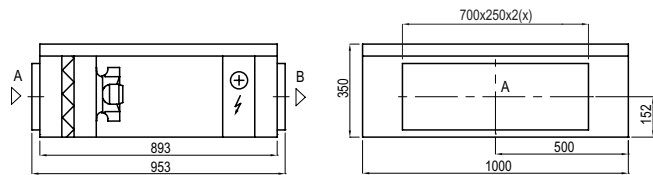

Acoustic data

A-weighted sound power level L_{WA} , dB(A) at nominal flow rate

Supply inlet	70
Supply outlet	75
Casing	52

A-weighted sound pressure level L_{pA} , dB(A)


10 m² normally isolated room, distance from casing – 3 m.

Surroundings	41
--------------	----

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Verso S 2100 F-HE/15	3~400	15,0	24,7	21,9
Verso S 2100 F-HE/22,5	3~400	22,5	35,6	32,9
Verso S 2100 F-HW	1~230	–	3,3	–

Performance

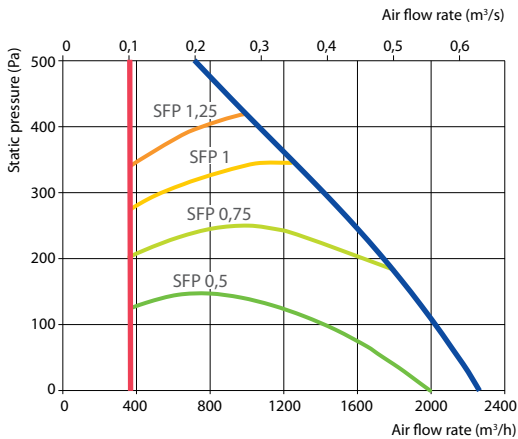

* Compliance to ErP2018 requirements check with the selection program.

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	17,0	14,4	11,7
Flow rate, dm ³ /h	752	632	511
Pressure drop, kPa	7,5	5,9	4,5
Temperature in/out, °C	-5,0/21,7	-5,0/17,5	-5,0/13,3
Maximal capacity, kW	17,0	14,4	11,7
Connection, "		½	

Accessories (p. 123)

Closing damper	SRU-M-700x250+LF24/LM24
Silencer	A STS-IVR3BA-800-250-700-S
	B STS-IVR3BA-800-250-1250-S
PPU	PPU-HW-3R-15-2.5-W2
Air heater-cooler	DCW-2,0-13
2-way valve	VVP47.20-4,0+SSP61
DX cooler	DCF-2,0-14
Cooling unit	MOU-48HFN8+KA8243