



GMA60SMF

GRI

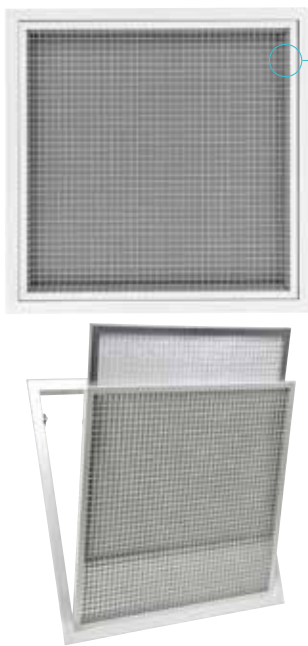

GMA

PREZZI - PRICES

STOCK

BxH	GMA60SMF	GMA60SM	FILTRO - FILTER	SC	PDZ1	PDZ11	PDZ2	PDZ12
mm	€	€	€	€	€	€	€	€
595x595								

VERNICIATURA - PAINTING:

Colori RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%
Altri colori: prezzi a richiesta - Different colors: prices on request

DESCRIZIONI - DESCRIPTIONS:

GMA60SMF: Griglia a maglia quadra 13x13 mm, smontabile dimensione 595x595 mm con filtro incluso - Egg crate grille 13x13 mm pitch with removable core, 595x595 mm overall size, with filter

GMA60SM: Griglia a maglia quadra 13x13 mm, smontabile dimensione 595x595 mm senza filtro - Egg crate grille 13x13 mm pitch with removable core, 595x595 mm overall size, without filter

CARATTERISTICHE:

Griglie a maglia quadra 13x13 mm, smontabile per controsoffitto dim. 595x595 esterno cornice.

COSTRUZIONE:

Alluminio anodizzato.

IMPIEGO:

A controsoffitto, in ripresa.

FISSAGGIO:

Fissaggio con clips o su richiesta con viti frontali.

ACCESSORI:

- Plenum in acciaio zincato standard e isolato.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.

CHARACTERISTICS:

Egg crate grilles 13x13 mm pitch, with removable core for false ceilings 595x595 overall size.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For false ceilings installation and for air intake.



FIXING:

Fixing by using clips or frontal screws on demand.

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
- Calibration damper made of galvanized steel and fins with opposite movement.

DISEGNI - DRAWINGS

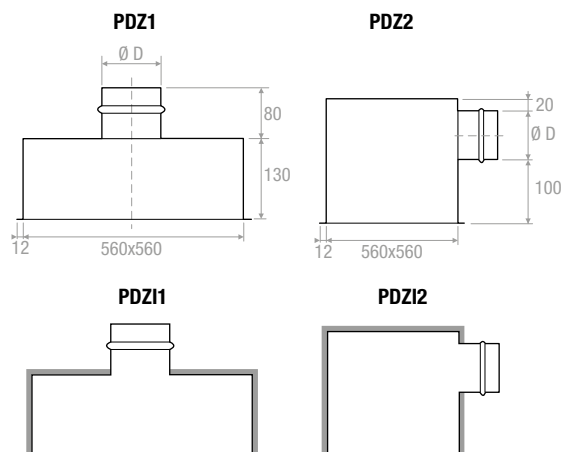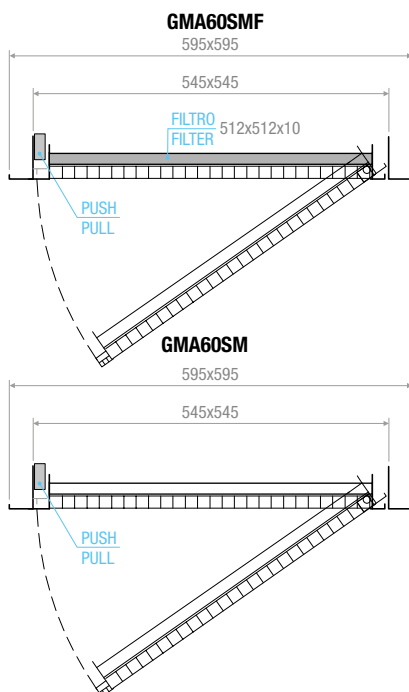

Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm

DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

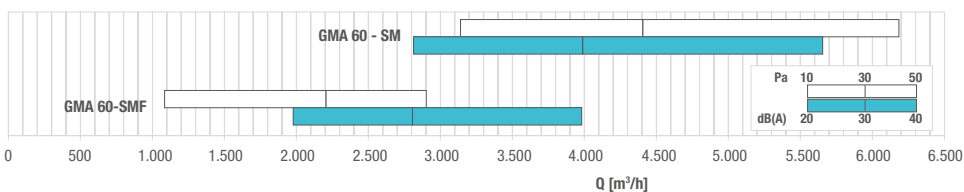


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A _x [m²]	Q [m³/h]		L _{wa} [dB(A)]		D _p [Pa]	
		min	max	min	max	min	max
GMA60SM	0,2639	3140	6190	33	53	5	20
GMA60SMF	0,2639	1090	2910	-	31	10	50

